



ADAPTER

# getConnInfo

Kind: Function

VERSION  
**5**

UPDATED  
**12 August 2026**

DOCUMENT  
**reference-subsystem-src-adapter/function-getconninfo-5**

## CONTENTS

|          |            |          |          |                        |          |
|----------|------------|----------|----------|------------------------|----------|
| <b>1</b> | Signature  | <b>2</b> | <b>4</b> | Usage                  | <b>2</b> |
| <b>2</b> | Parameters | <b>2</b> | <b>5</b> | AI Coding Instructions | <b>3</b> |
| <b>3</b> | Diagram    | <b>2</b> |          |                        |          |

**Kind:** Function

**Source:** `src/adapter/cloudflare-pages/conninfo.ts`

**Part of:** [Adapter](#)

Get connection information from Cloudflare Pages

`getConnInfo` reads connection details from a Cloudflare Pages request. It maps Cloudflare-specific request metadata into the connection information shape used by the adapter layer.


## 1 Signature

```
function getConnInfo(c)
```

## 2 Parameters

| Name           | Type             |
|----------------|------------------|
| <code>c</code> | <code>any</code> |

## 3 Diagram

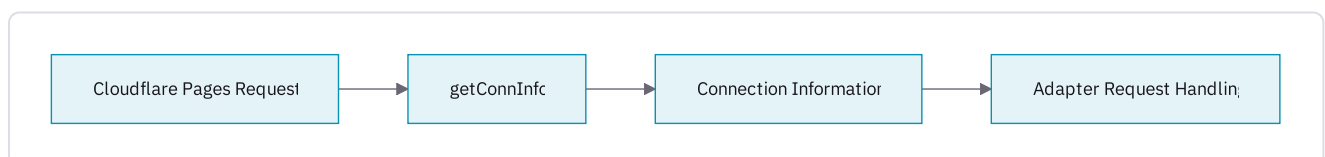

## 4 Usage

```
import { getConnInfo } from "../conninfo"

export const onRequest: PagesFunction = async ({ request }) => {
  const connInfo = getConnInfo(request)

  console.log(connInfo)

  return new Response("OK")
}
```

## 5 AI Coding Instructions

- Pass the Cloudflare Pages `Request` object to `getConnInfo`.
- Keep Cloudflare-specific header and request metadata handling inside this adapter module.
- Return connection data in the shared shape expected by the rest of the adapter system.
- Account for connection fields that may be absent in local development or test environments.